


Anssems

T r a i l e r s

KSX

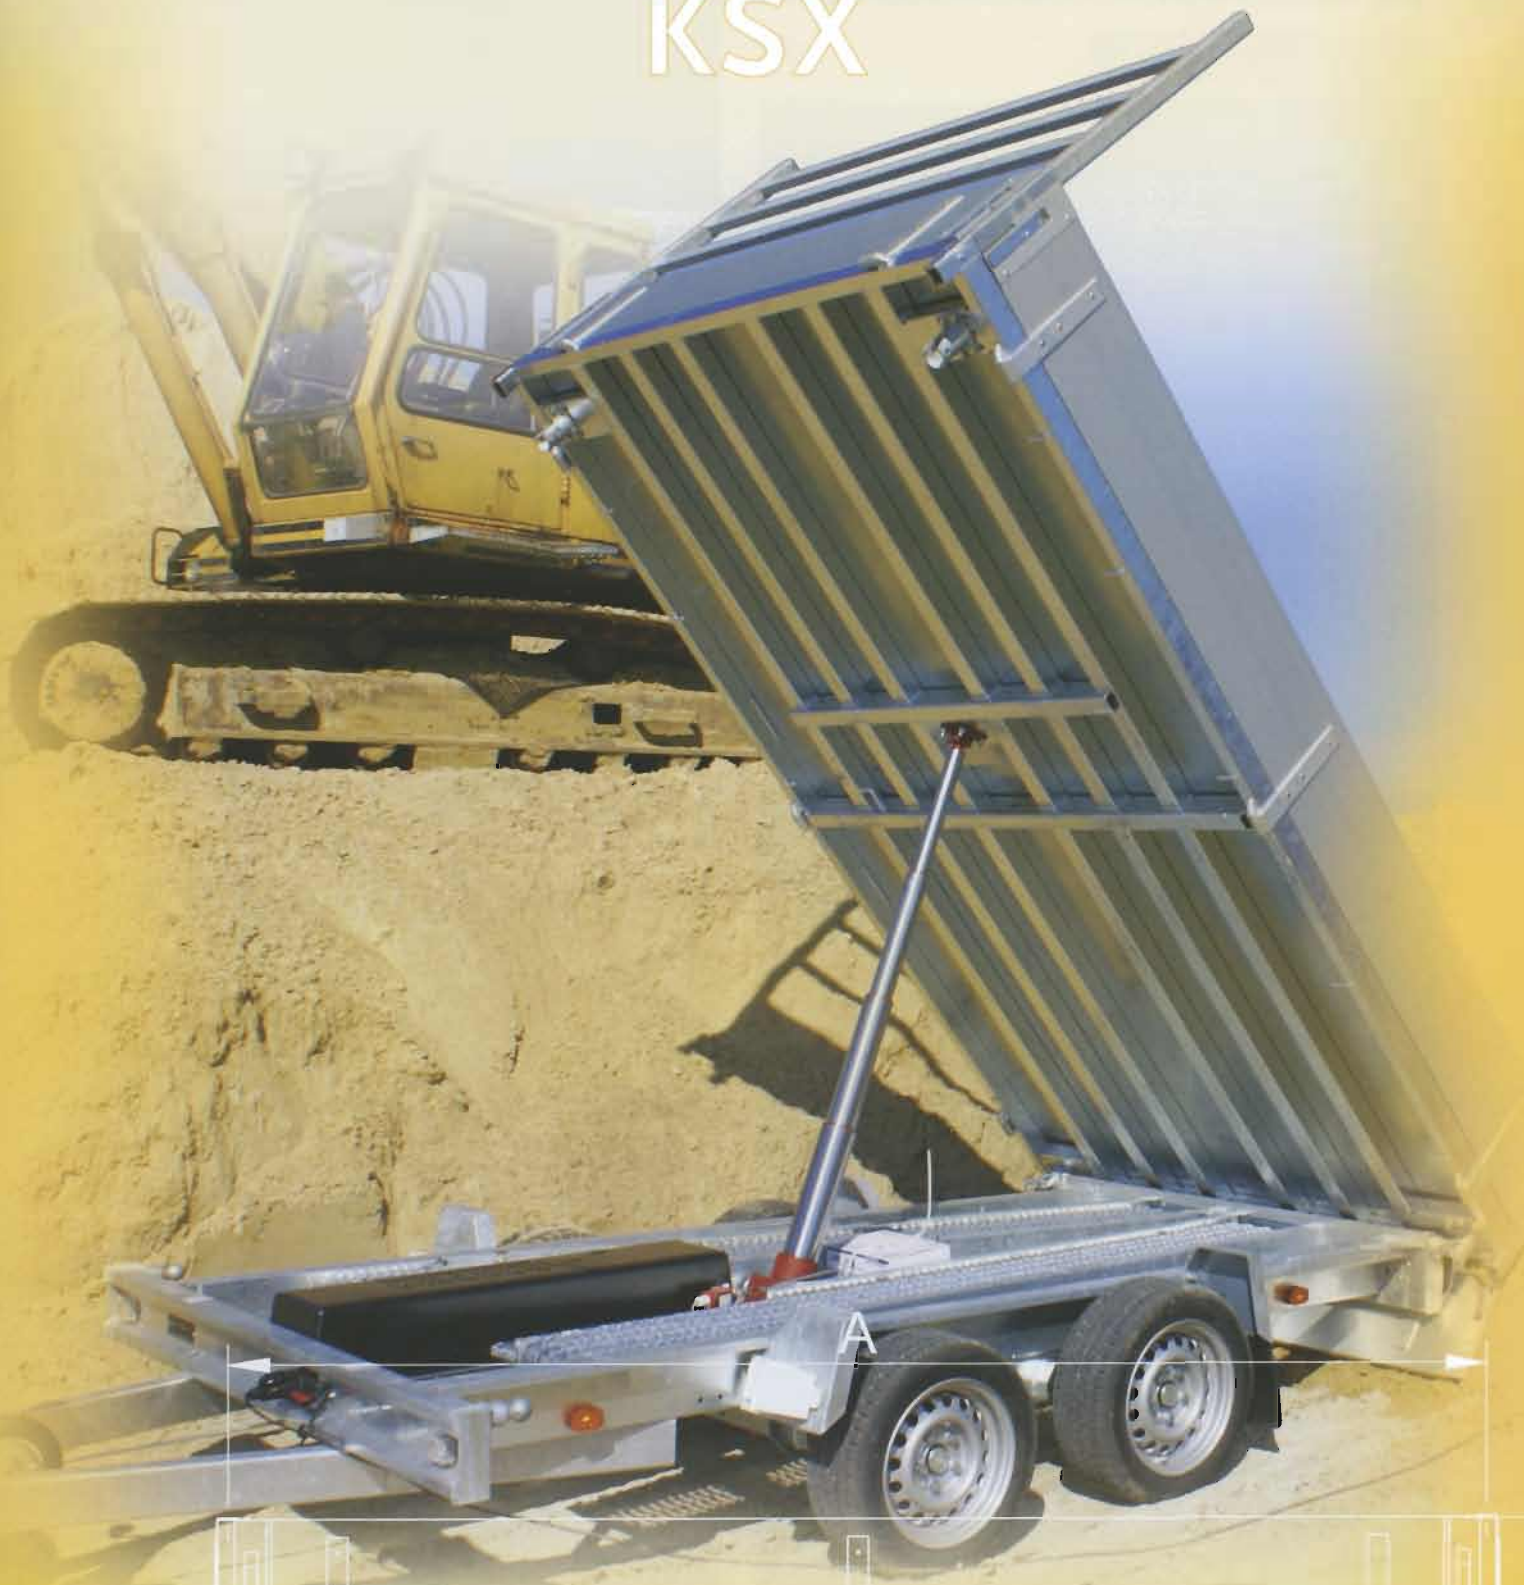

KSX - the three-way tipper trailer

Quality is the trademark of Ansems Trailers. Thanks to our years of experience and listening to our customers who use our trailers, we know what your requirements are. Our tipper trailers are ideal for transporting loose bulk goods, as the tipping action makes it so easy to unload. At Ansems Trailers we make stability and safety a priority. Our tipper trailers have been developed and produced with the aid of advanced technology, and in order to be able to meet everyone's requirements, we have a full range of tipper trailers with many optional extras available.

Stability

The steel chassis of the tipper trailer is made up of two parts – an upper body chassis and a lower chassis, both parts are robot welded and hot-dip galvanised. The V-shaped drawbar is 145 cm long, which ensures great



KSX 2000 H



KSX 2000 E



KSX 3000 E

road stability. The axle, overrun brake and coupling we use are of the highest quality. Due to the fact that tipper trailers often have to carry very heavy abrasive loads, ours have a steel floor plate that is 2,5 mm thick. The floor plate is a single piece of steel without any joints and is supported by many main and cross beams of the upper body chassis, which provides a very strong support for the floor plate.

Safety

At Ansems Trailers we feel very strongly about safety. All of our tipper trailers are fitted with a safety prop to support the tipper body when raised, enabling you to safely carry out maintenance on your trailer. The electric models are equipped with a main power isolation switch which enables you to switch off the power supply to the trailer and come complete with a remote control that allows you to operate the tipper from a safe distance and keep a close eye on the tipping of the load. An audible alarm sounds to warn onlookers when the tipping body is being lowered. It goes without saying that the tipper has to be safe to operate, but safety on the road is just as important. The lights, which have been fitted in compliance with EC requirements, have been improved with the additional side marker lights. In short, with an Ansems tipper trailer you are safe when tipping but also safe when you are out on the road.

Tipper Range

There are three different models in the tipper range. The KSX 2000, which has a gross weight of 2000 kg, is equipped with a manual pump or an electric pump.

The KSX 3000, which has a gross weight of 3000 kg, is only equipped with an electric pump. The electric pump is powered by a 12 v battery that only needs to be recharged once a week. The charger is supplied.

All of our tipper trailers are three-way tippers, which means that you can tip the load backwards or to either side. To change the direction in which you tip the load you simply move a pin.



Retractable jockey wheel



Safety support



Loading ramps (optional)

Extension sides (optional)

Ramps

For machines that are often loaded onto tipper trailers, we supply hot dipped galvanised steel ramps, which are 250 cm long. These can be kept in the integrated ramp storage holders so you can always have the ramps to hand and are prepared for all eventualities. The ramp can also be positioned over the full width of the trailer so you can carry vehicles of various trackwidths that weigh up to 2500 kg.

Extension sides

Aluminium extension sides enable you to increase the height of the sides of the trailer to 100 cm. This is especially useful if you need to load items such as grass, leaves or garden waste. The extension sides are hinged side and rear so you still retain all of the tipping options. And because the extension sides are easily detachable, you can still use the trailer for other purposes.



Tie hook

Lighting

Battery charger (electric pump)

Ladder rack (optional)



Spare wheel and holder (optional)


Spare wheel and holder (optional)



Axle shock absorber (optional)

	KSX2000-H 305 x 178 Hand	KSX2000-E 305 x 178 Electric	KSX3000-E 305 x 178 Electric
Dimensions/weights			
Maximum gross weight	2000/1500	2000/1500	3000/1500
Unladen weight	690	745	770
Payload	1310/810	1255/755	2230/730
Internal platform length (A)	305	305	305
Internal platform width (B)	178	178	178
Loading height (C)	68	68	65
Pole length (D)	145	145	145
Overall length (E)	456	456	456
Overall width (F)	185	185	185
Total height (G)	98	98	95
Height of sides (H)	30	30	30
Tyre size	185/70R13	185/70R13	195/50R13
Accessory			
Ladder rack, with an height (J) of:	* 80	* 80	* 80
Extension sides with an height (M) of:	100	100	100
High cover 150 cm, with an internal height (K) of: and an overall height (L) of:	* 145 223	* 145 223	* 145 220
High cover 180 cm, with an internal height (K) of: and an overall height (L) of:	* 175 253	* 175 253	* 175 250
Flat cover	*	*	*
Axle shock absorber	*	*	*
Spare tyre and holder	*	*	*

*Accessory is deliverable at the mentioned trailer.
Dimensions mentioned in cm, weights in kg.

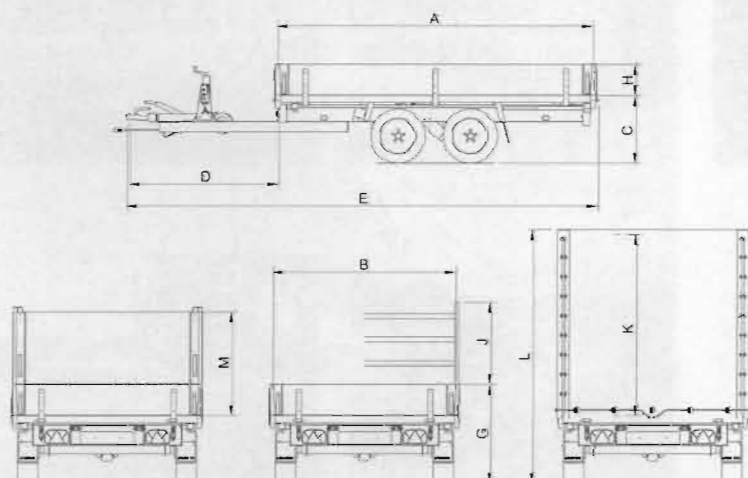

Your Anssems dealer:

Mex byggingavörur ehf.
Lynghóls 3 Árbæjarhverfi
Sími 567 1300 & 848 3215
www.byggingavorur.com



High rear tipping angle



Tipping to the side (standard)



Extension sides (easy unloading)



High load capacity

